

MILWAUKEE TOOL

Milwaukee Electric Tool Corporation BROOKFIELD, WI 53005

Tel: +1 (262) 781-3600 • Fax: +1 (262) 790-6333

Milwaukee Asia Office 29/F, Tower 2, Kowloon Commerce Centre, 51 Kwai Cheong Road, Kwai Chung, Hong Kong Tel: +852-2492-2181 • Fax: +852-2490-4778


Distributed by:

All data incl. service and warranty conditions as well as product range are subject to change without notice. Pictures not binding. No liability for printing errors or mistakes. © 2021 Milwaukee Electric Tool Corporation All trademarks are owned by Techtronic Cordless GP unless otherwise stated.

www.milwaukeetool.asia



DRIVEN TO OUTPERFORM."

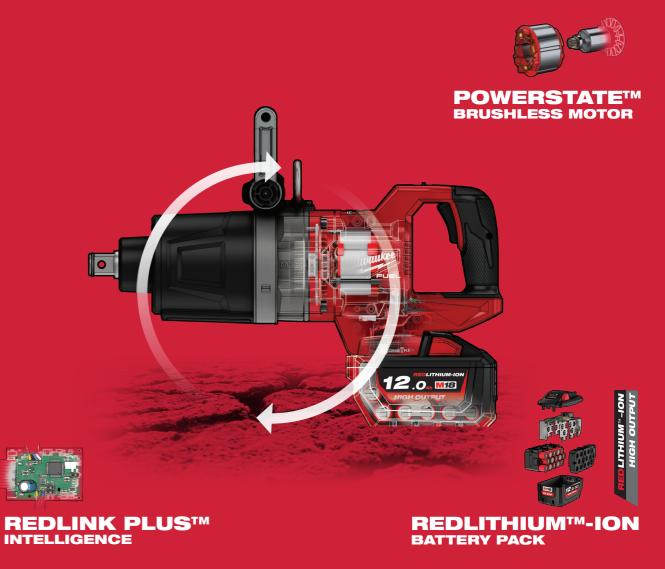

M18 ONEFHIWF1DS M18 FUEL 1" D-HANDLE HIGH TORQUE NUT-BUSTING IMPACT **WRENCH**

UP TO TORQUE

UP TO 200 BOLTS PER CHARGE

ELIMINATES COMPRESSORS & HOSES



DRIVEN TO OUTPERFORM.

M18 FUEL is engineered for the most demanding tradesmen in the world. Delivering unrivaled performance in a compact structure, all M18 FUEL products feature three MILWAUKEE exclusive innovations - the POWERSTATE Brushless Motor, REDLITHIUM-ION Battery Pack and REDLINK PLUS Intelligence Hardware and Software - that deliver unmatched power, run-time and durability.



4-MODE **DRIVE CONTROL**

Adjust the RPM and avoid over-torque



TRI-LED WORKLIGHT

Delivers high definition lighting to increase workspace visibility with less shadows



M18 FUEL 1" D-HANDLE HIGH TORQUE IMPACT WRENCH

UP TO 2,711NM NUT-BUSTING TORQUE PER CHARGE



- Provides up to 2,600Nm power to tighten M48+ bolts
- Delivers up to 2,711 Nm nut-busting torque to breakaway stubborn fasteners

UP TO 200 BOLTS



■ Enables user to fasten up to 200 M30 bolts per charge with **REDLITHIUM HIGH** OUTPUT 12.0 Ah battery, delivering the runtime needed for demanding applications

ELIMINATES COMPRESSORS & HOSES



- Allows access to remote jobsite without sacrificing power or performance
- Eliminates compressors and hoses to increase portability and access, lower cost of ownership and increase jobsite safety









SPECIFICATIONS

DESCRIPTION	SPECIFICATIONS
No Load Speed (rpm)	0-600 / 0-700 / 0-900 / 0-1,200
Impact Rate (ipm)	0-750 / 0-930 / 0-1,200 / 0-1,440
Torque (Nm)	1,180 / 1,254 / 1,966 / 2,576

DESCRIPTION	SPECIFICATIONS
Max. Bolt Diameter	M48
Max. Nut Busting Torque (Nm)	2,711
Anvil Type (Friction Ring)	1" Square
Weight w/ 12.0Ah Battery Pack (kg)	11.34