



# M12 FUEL™

DRIVEN TO OUTPERFORM.™



**REDLINK PLUS™**  
INTELLIGENCE



**REDLITHIUM™-ION**  
BATTERY PACK



**POWERSTATE™**  
BRUSHLESS MOTOR



M12 FRAIW  
**M12 FUEL**  
**RIGHT**  
**ANGLE**  
**IMPACT**  
**WRENCHES**

UP TO  
**300** NM  
NUT-BUSTING  
TORQUE

MORE  
**ACCESS** IN  
TIGHT SPACES


4-MODE  
**DRIVE**  
CONTROL



# DRIVEN TO OUTPERFORM.

M12 FUEL is engineered for the most demanding tradesmen in the world. M12 FUEL delivers unrivaled performance in a compact structure and features three MILWAUKEE exclusive innovations - the POWERSTATE™ Brushless Motor, REDLITHIUM™-ION Battery Pack and REDLINK PLUS™ Intelligence Hardware and Software - that deliver unmatched power, run-time and durability. Simply put, the M12 FUEL Digital Torque Wrench is fast, accurate and a productive tool for installations.

## M12 FUEL™

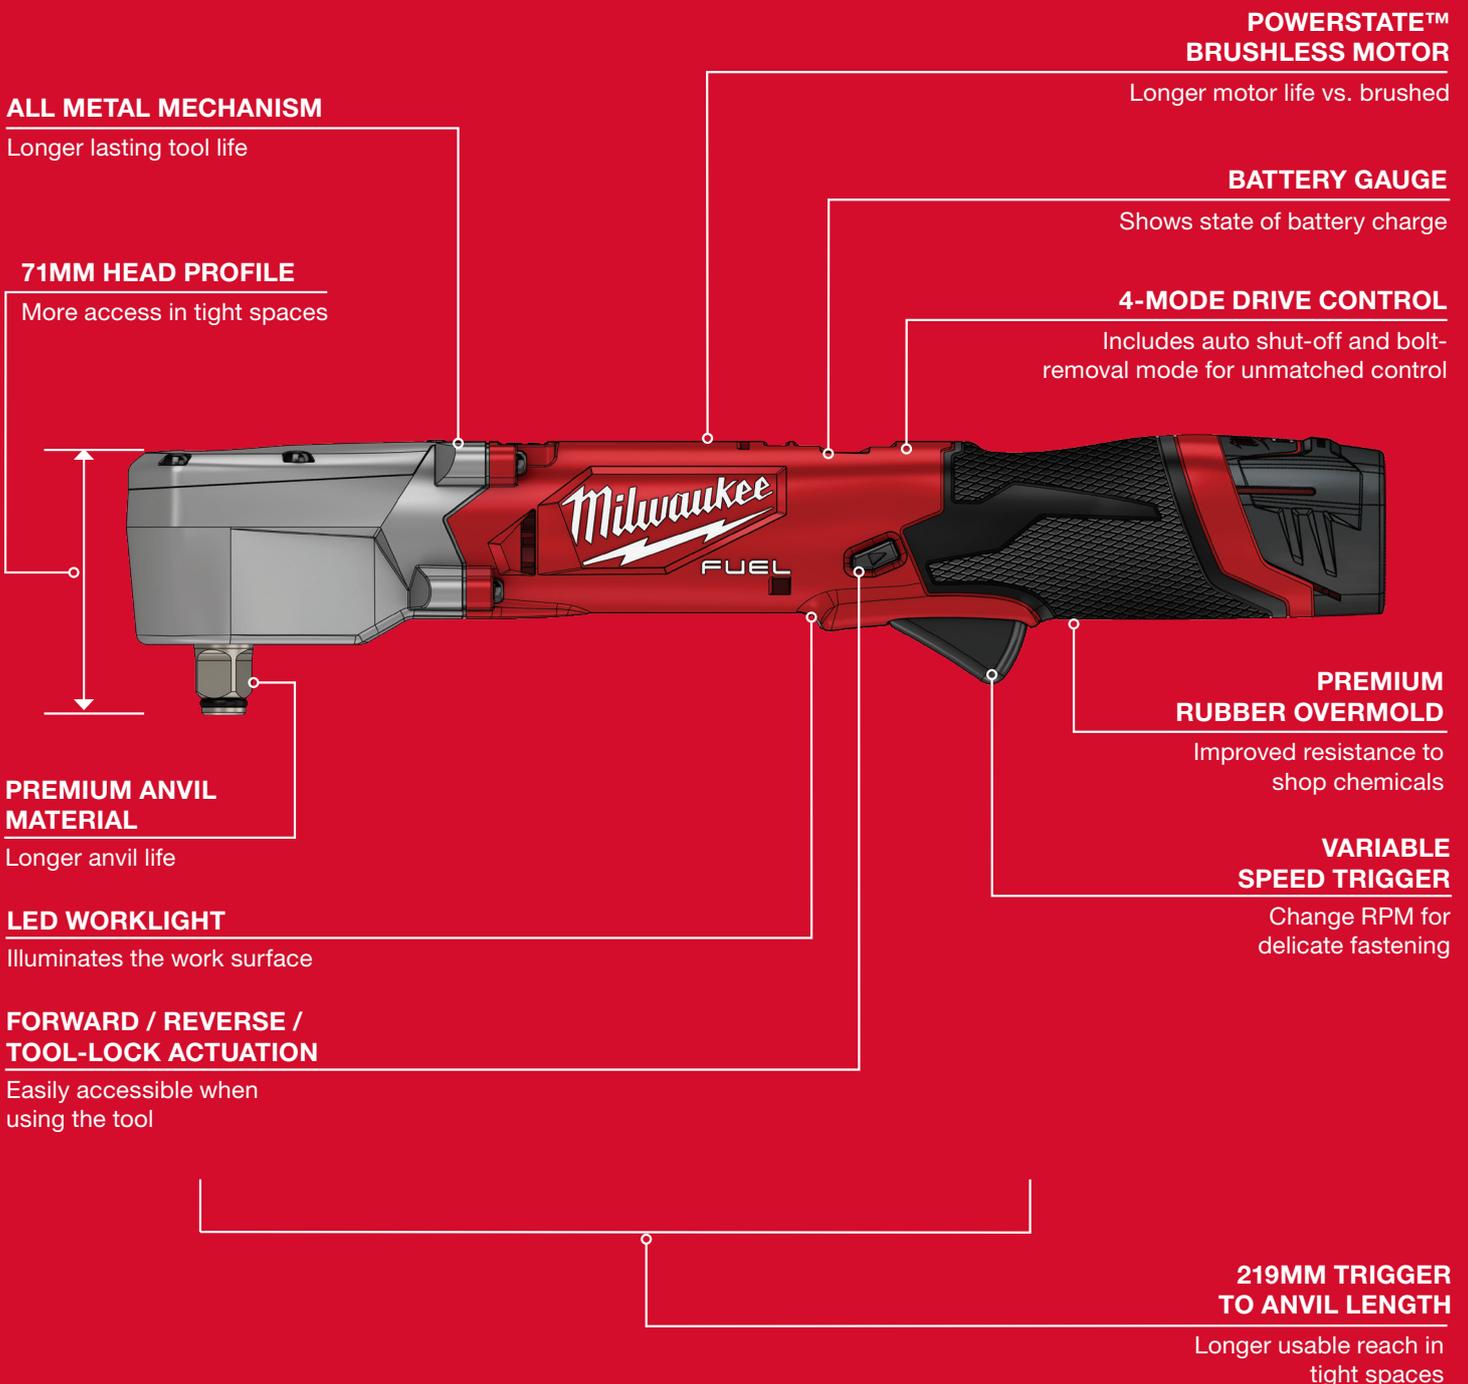

# M12 FUEL RIGHT ANGLE IMPACT WRENCHES

## UP TO 300NM NUT-BUSTING TORQUE


### MORE POWER FOR INCREASED PRODUCTIVITY



- Delivers best-in-class torque output
- Superior power offers true pneumatic replacements
- Ability to complete high demand applications

## MORE ACCESS TIGHT SPACES

### SMALLER HEAD PROFILE & LONGER REACH

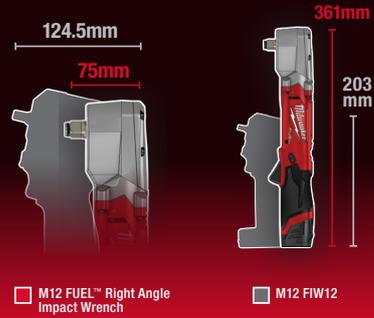

- Designed with a slim head profile for more access
- Long body design allows users longer usable reach
- Ability to complete applications that traditional pistol-grip impact tools cannot
- Decreases the need for socket extensions often used with pistol-grip impact tools.

## 4-MODE DRIVE CONTROL

### UNMATCHED CONTROL



1 MODE	2 MODE	3 MODE	< 20Nm AUTO SHUT-OFF MODE < 20Nm Prevents Overtightening
0 – 1,550 RPM	0 – 2,300 RPM	0 – 3,000 RPM	300Nm BOLT REMOVAL MODE More Control After Bolt Breakaway
0 – 1,350 IPM 90 Nm	0 – 2,700 IPM 160 Nm	0 – 3,600 IPM 270 Nm	

- 4-Modes offer users the most drive options in the industry on a right angle impact wrench



## SPECIFICATIONS

### M12 FUEL 1/2" Right Angle Impact Wrench

DESCRIPTION	SPECIFICATIONS
Torque	90 / 160 / 270 Nm
RPM	0 – 1,550 / 2,300 / 3,000 / 3,000
Anvil	1/2" SQ w/ Friction Ring

DESCRIPTION	SPECIFICATIONS
Nut-Busting Torque	300Nm
IPM	0 – 1,350 / 2,700 / 3,600 / 3,600
Weight (w/2.0Ah Battery)	1.5 kg

### M12 FUEL 3/8" Right Angle Impact Wrench

DESCRIPTION	SPECIFICATIONS
Torque	90 / 160 / 270 Nm
RPM	0 – 1,550 / 2,300 / 3,000 / 3,000
Anvil	3/8" SQ w/ Friction Ring

DESCRIPTION	SPECIFICATIONS
Nut-Busting Torque	300Nm
IPM	0 – 1,350 / 2,700 / 3,600 / 3,600
Weight (w/2.0Ah Battery)	1.5 kg



Nothing but **HEAVY DUTY**

## MILWAUKEE TOOL

Milwaukee Electric Tool Corporation  
BROOKFIELD, WI 53005  
USA

Tel: +1 (262) 781-3600 • Fax: +1 (262) 790-6333

Milwaukee Asia Office  
29/F, Tower 2, Kowloon Commerce Centre,  
51 Kwai Cheong Road, Kwai Chung, Hong Kong  
Tel: +852-2492-2181 • Fax: +852-2490-4778

Distributed by:

8/6/2020

All data incl. service and warranty conditions as well as product range are subject to change without notice. Pictures not binding. No liability for printing errors or mistakes. © 2020 Milwaukee Electric Tool Corporation. All trademarks are owned by Techtronic Cordless GP unless otherwise stated.

[www.milwaukeetool.asia](http://www.milwaukeetool.asia)