


ANCHOR STRAP

**TETHER MORE TOOLS,
MORE PLACES**

ANSI/ISEA
121-18



Holds 5 Carabiners
Oversized D-ring



Part #	Weight Rating	Description
48-22-8855	23 kg	23 kg Anchor Strap

SELF-ADHERING TAPE & D-RING WEB ATTACHMENTS

EASILY CONNECT

Tape & D-Ring Web Attachments create a secure attachment point for tethering on most tools without a lanyard hole.



Part #	Weight Rating	Description
48-22-8860		12' Self-Adhering Tape
48-22-8870	0.9 kg	5 Pc 0.9 kg D-Ring Web Attachment
48-22-8871	2.3 kg	5 Pc 2.3 kg D-Ring Web Attachment

HAND TOOLS W / NO LANYARD HOLE



1. Use with D-ring attachment, self-adhering tape and locking tool lanyard
2. Weigh tool and then use taping specification chart cut the required length of tape
3. Lay the attachment accessory on the tool so the tape will be at least 1" away from the end of the tool. Place the attachment accessory so the folded end face up, away from the tool
4. Starting at the wedge end, make the required number of complete wraps stretching the tape as applied
5. Begin moving down the attachment accessory, overlapping half the tape width per wrap until the D-ring end is reached
6. To finish the taping, complete the required number of wraps at the D-ring end
7. Rub tape together to fully bond
8. Clip carabiner of locking tool lanyard to D-ring web attachment

Milwaukee™

TOOL LANYARDS



STAY SAFE.
STAY PRODUCTIVE. 




Nothing but **HEAVY DUTY.**

STAY SAFE.
STAY PRODUCTIVE.



MILWAUKEE Tool Lanyards and Accessories improve safety on the jobsite for tradesman without affecting productivity. Best-in-class shock absorption gently slows a dropped tool, while a 360° swivel carabiner prevents twists and tangles, allowing users to continue working efficiently without fighting the tether. The Quick-Connect System takes productivity further, providing fast and easy tool change out to the main lanyard for frequently used tools.

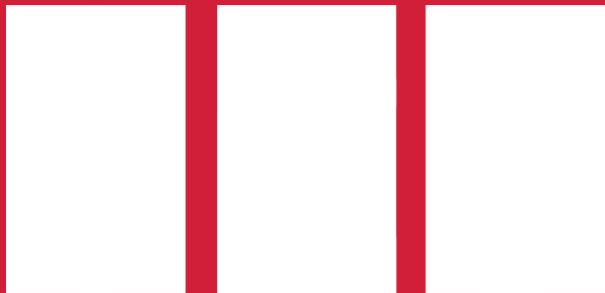


Superior Shock Absorption

Double Locking Carabiner

Integrated Swivel

WEIGHT RATING



Reduces risk of injuries



Avoids equipment damages



Eliminates disruption of work

Tethering tools when working at height reduces risk of injuries

RETRACTABLE TOOL LANYARD

LASTING DURABILITY
SURVIVES MORE DROPS

ANSI/ISEA 121-18

Part #	Weight Rating	Description
48-22-8825	2.2 kg	2.2 kg 1.2m Retractable Tool Lanyard

LOCKING TOOL LANYARDS

SUPERIOR SHOCK ABSORPTION

ANSI/ISEA 121-18

Part #	Weight Rating	Description
48-22-8810A	4.5 kg	4.5 kg 0.91m Locking Tool Lanyard
48-22-8811A	4.5 kg	4.5 kg 1.37m Extended Reach Locking Tool Lanyard
48-22-8812	4.5 kg	4.5 kg 1.82m Extended Reach Locking Tool Lanyard
48-22-8815A	6.8 kg	6.8 kg 0.91m Locking Tool Lanyard
48-22-8816	6.8 kg	6.8 kg 1.37m Extended Reach Locking Tool Lanyard
48-22-8817	6.8 kg	6.8 kg 1.82m Extended Reach Locking Tool Lanyard
48-22-8850A	15 kg	15 kg 0.91m Locking Tool Lanyard

QUICK-CONNECT LOCKING TOOL LANYARD SYSTEM

SUPERIOR SHOCK ABSORPTION

QUICK-CONNECT LANYARD SYSTEM

ANSI/ISEA 121-18

Part #	Weight Rating	Description
48-22-8820A	4.5 kg	4.5 kg 0.91m Quick-Connect Locking Tool Lanyard
48-22-8822A	2.2 kg	3 Pc 2.2 kg Quick-Connect Lanyard Accessory
48-22-8823A	4.5 kg	3 Pc 4.5 kg Quick-Connect Lanyard Accessory